


MANIPULATOR



Strojírna Pálava Maxima s.r.o.

DESÁTKOVÁ 124/15, 623 00 BRNO KOHOUTOVICE Manufactory: TOVÁRNÍ 34, 679 32 SVITÁVKA, CZECH REPUBLIC tel: +420 - 516 453 834, fax: +420 - 516 453 834 e-mail: <u>info@s-palava.cz</u>; <u>www.s-palava.cz</u>



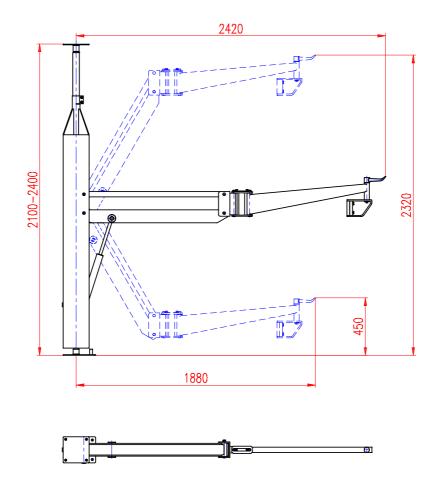

Manipulator is used as the additional attachment placed in the box of refrigerating truck. It enables the easy re-hanging of the pork halves and beef quarters from the aerial trail of the refrigerating truck to the customer aerial trail. Manipulator drive is hydraulic, aggregate is car electricity powered.

The main part of the manipulator is the rotary pillar with control arm and hydraulic aggregate. Elevation movement of the arm is served by the crew through 2 buttons; axial rotation is made by the crew. Whole device is made from stainless steel.

Technical data

Column's height Supply voltage Drive Loading capacity 2100 - 2400 mm 12/55A or 24/28A hydraulic 180 kg