




WASHBASIN
knee operated
type UMN



Strojírna Pálava Maxima s.r.o.

DESÁTKOVÁ 124/15, 623 00 BRNO KOHOUTOVICE
Manufactory: TOVÁRNÍ 34, 679 32 SVITÁVKA, CZECH REPUBLIC
tel: +420 - 516 453 834, fax: +420 - 516 453 834

e-mail: info@s-palava.cz ; www.s-palava.cz

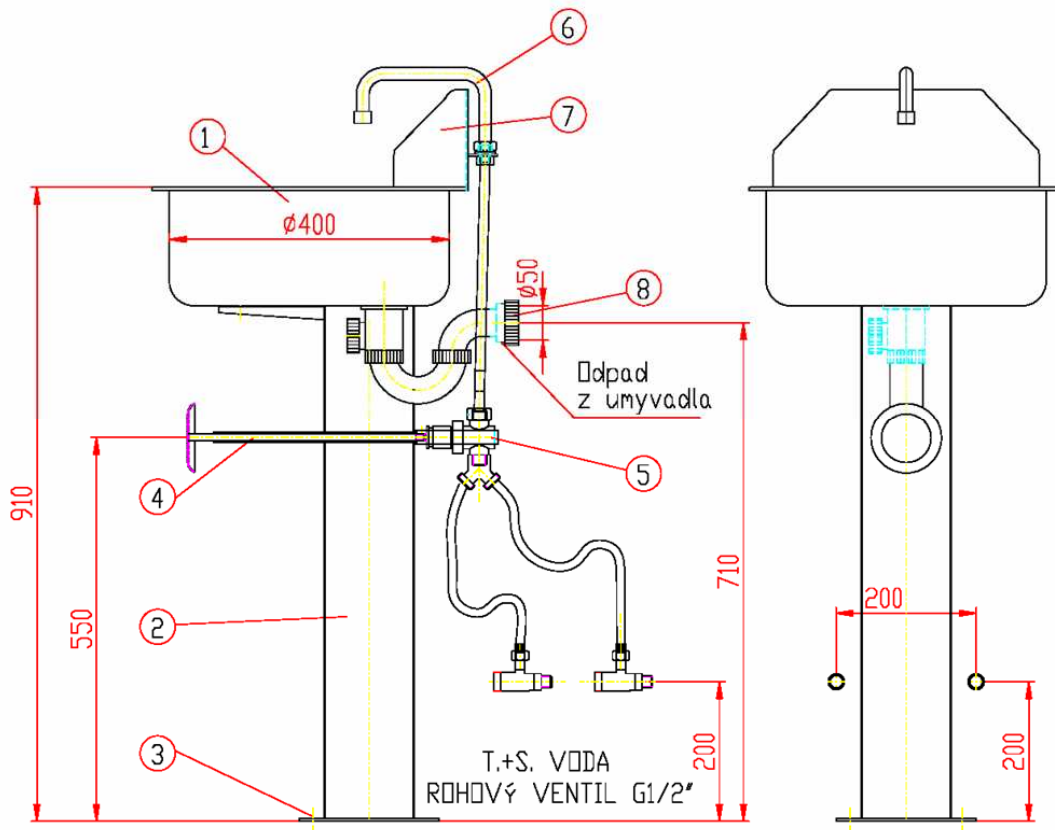

The washbasin type UMN is composed of sink (1), which is fixed to the stand (2) and this all is fixed into the floor with flange (3). Knee starter (4) serves through the valve (5) water let in. The water pours out of the upper rotary arm (6). The sink is equipped with protection cover (7) against water spouting on the wall. The washbasin is connected with two ½" angle valves (with filters) with external threads for hot and cold water by witch is set the water temperature. Water seal Ø 50 mm (8) serves to water discharge.

Technical data

Diameter	400 mm
Total height	~1000 mm
Weight	14 kg